

BOMBA SUMERGIBLE • BILGE PUMP • POMPA SOMMERGIBILE

REF	🌊	⚡	Ø
SFBP1G35001	350 GPH 1350 l/h	12 V (1.0 A)	19 mm / 3/4"
SFBP1G75001	750 GPH 2850 l/h	12 V (2.5 A)	19 mm / 3/4"
SFBP2G75001	750 GPH 2850 l/h	24 V (1.2 A)	19 mm / 3/4"
SFBP1G300001	3000 GPH 11400 l/h	12 V (14.0 A)	40 mm / 1/2"
SFBP2G300001	3000 GPH 11400 l/h	24 V (8.0 A)	40 mm / 1/2"

SEAFLO



REF	🌊	⚡	Ø
SFBP1G35003	350 GPH 1350 l/h	12 V (1.0 A)	19 mm / 3/4"
SFBP1G60003	600 GPH 2300 l/h	12 V (3.0 A)	19 mm / 3/4"
SFBP1G80003	800 GPH 3000 l/h	12 V (4.0 A)	19 mm / 3/4"

SEAFLO



REF	🌊	⚡	🔌	📏	ALTURA MÁX. MAX HEAD ALT. MAX.
SFBP1G50001	500 GPH 1.900 l/h	12 V (2.2 A)	19 mm 3/4"	108 x 70 mm 4,25" x 2,75"	3 m
SFBP2G50001	500 GPH 1.900 l/h	24 V (1.2 A)	19 mm 3/4"	108 x 70 mm 4,25" x 2,75"	3 m
SFBP1G110001	1.100 GPH 4.180 l/h	12 V (3.0 A)	29 mm 1 1/8"	108 x 70 mm 4,25" x 2,75"	4 m
SFBP2G110001	1.100 GPH 4.180 l/h	24 V (1.8 A)	29 mm 1 1/8"	108 x 70 mm 4,25" x 2,75"	4 m

SEAFLO



REF	🌊	⚡	🔌	📏	ALTURA MÁX. MAX HEAD ALT. MAX.
SFBP1G350001	3.500 GPH 13.300 l/h	12 V (12 A)	40 mm 1 1/2"	182 x 139 mm 5,97" x 5,49"	8 m
SFBP2G350001	3.500 GPH 13.300 l/h	24 V (8 A)	40 mm 1 1/2"	182 x 139 mm 5,97" x 5,49"	8 m

SEAFLO



REF	🌊	⚡	🔌	📏	ALTURA MÁX. MAX HEAD ALT. MAX.
SFBP1G150001	1.500 GPH 5.700 l/h	12 V (8 A)	29 mm 1 1/8"	152 x 108 mm 5,97" x 4,25"	5 m
SFBP2G150001	1.500 GPH 5.700 l/h	24 V (5 A)	29 mm 1 1/8"	152 x 108 mm 5,97" x 4,25"	5 m
SFBP1G200001	2.000 GPH 7.600 l/h	12 V (10 A)	29 mm 1 1/8"	152 x 108 mm 5,97" x 4,25"	6 m
SFBP2G200001	2.000 GPH 7.600 l/h	24 V (6 A)	29 mm 1 1/8"	152 x 108 mm 5,97" x 4,25"	6 m

SEAFLO



REF	🌊	⚡	🔌
GS20115	400 GPH / 1.500 l/h	12 V (3 A)	19 mm
GS20116	600 GPH / 2.300 l/h	12 V (4 A)	19 mm
GS20117	1.400 GPH / 5.300 l/h	12 V (7 A)	29 mm
GS20118	1.400 GPH / 5.300 l/h	24 V (3,5 A)	29 mm

GOLDENSHIP





REF				
GS20100	400 GPH / 1.500 l/h	12 V (3 A)	19 mm	
GS20101	600 GPH / 2.300 l/h	12 V (4 A)	19 mm	
GS20103	1.400 GPH / 5.300 l/h	12 V (7 A)	29 mm	
GS20104	2.300 GPH / 8.700 l/h	12 V (13 A)	32 mm	
GS20105	1.400 GPH / 5.300 l/h	24 V (3 A)	29 mm	
GS20106	2.300 GPH / 8.700 l/h	24 V (6 A)	32 mm	

GOLDENSHIP



REF				
SH355-020-10	380 GPH / 1.438 l/h	12 V (1,7 A)	19 mm	114 x 95 mm
SH355-010-10	500 GPH / 1.893 l/h	12 V (1,8 A)	19 mm	114 x 95 mm
SH355-110-10	700 GPH / 2.650 l/h	12 V (3,2 A)	19 mm	114 x 95 mm
SH355-100-10	1.000 GPH / 3.785 l/h	12 V (3,2 A)	29 mm	114 x 95 mm

SHURflo

ISO 8849



REF				
SH358-000-10	1.500 GPH / 5.677 l/h	12 V (8 A)	29 mm	184 x 95 mm
SH358-100-10	1.500 GPH / 5.677 l/h	24 V	29 mm	184 x 95 mm
SH358-010-10	2.000 GPH / 7.569 l/h	12 V (10 A)	29 mm	184 x 95 mm
SH358-110-10	2.000 GPH / 7.569 l/h	24 V	29 mm	184 x 95 mm

SHURflo

ISO 8849



REF				
RU24	360 GPH / 1.400 l/h	12 V (2,1 A)	2,5 A	19 mm 3/4" 89 x 60 mm 3 1/2" x 2 3/8"
RU25D	500 GPH / 1.900 l/h	12 V (1,9 A)	2,5 A	19 mm 3/4" 89 x 60 mm 3 1/2" x 2 3/8"
RU20R	800 GPH / 3.000 l/h	12 V (2,8 A)	5 A	19 mm 3/4" 95 x 60 mm 3 3/4" x 2 3/8"
RU21R	800 GPH / 3.000 l/h	24 V (1,3 A)	2,5 A	19 mm 3/4" 95 x 60 mm 3 3/4" x 2 3/8"
RU27D	1.100 GPH / 4.200 l/h	12 V (3,3 A)	6 A	29 mm 1 1/8" 108 x 60 mm 4 1/4" x 2 3/8"
RU28D	1.100 GPH / 4.200 l/h	24 V (1,3 A)	2,5 A	29 mm 1 1/8" 108 x 60 mm 4 1/4" x 2 3/8"

rule

ISO 8849



REF				
RU20F	800 GPH / 3.000 l/h	12 V (2,8 A)	5 A	19 mm 3/4" 102 x 73 mm 4" x 2 7/8"
RU20A	1.000 GPH / 3.800 l/h	12 V (2,9 A)	5 A	29 mm 1 1/8" 102 x 73 mm 4" x 2 7/8"

rule

ISO 8849



REF				
RU02	1.500 GPH / 5.700 l/h	12 V (4,8 A)	10 A	28 mm 1 1/8" 152 x 108 mm 6" x 4 1/4"
RU03	1.500 GPH / 5.700 l/h	24 V (2,3 A)	4 A	28 mm 1 1/8" 152 x 108 mm 6" x 4 1/4"
RU10	2.000 GPH / 7.600 l/h	12 V (8,4 A)	15 A	28 mm 1 1/8" 152 x 108 mm 6" x 4 1/4"
RU12	2.000 GPH / 7.600 l/h	24 V (4 A)	7,5 A	28 mm 1 1/8" 152 x 108 mm 6" x 4 1/4"
RU14A	3.700 GPH / 1.400 l/h	12 V (15,5 A)	25 A	38 mm 1 1/2" 184 x 108 mm 7 1/4" x 4 1/8"
RU16A	3.700 GPH / 1.400 l/h	24 V (6,9 A)	15 A	38 mm 1 1/2" 184 x 108 mm 7 1/4" x 4 1/8"

rule

ISO 8849





BOMBA SUMERGIBLE AUTOMÁTICA
AUTOMATIC BILGE PUMP
POMPA SOMMERSIBILE AUTOMÁTICA

Con sensor de nivel incorporado. With level sensor in a single compact housing. Con sensore di livello incorporato.

REF	Icona	Voltaje	Amperaje	Diámetro	Altura
RU500		12 V (1,9 A)	2,5 A	19 mm 3/4"	102 x 127 mm 4" x 5"
RU50024		24 V (1 A)	1,5 A	19 mm 3/4"	102 x 127 mm 4" x 5"
RU750		12 V (2,8 A)	5 A	19 mm 3/4"	102 x 127 mm 4" x 5"
RU75024		24 V (1,4 A)	2,5 A	19 mm 3/4"	102 x 127 mm 4" x 5"
RU1100		12 V (3,3 A)	6 A	29 mm 1 1/8"	102 x 127 mm 4" x 5"
RU110024		24 V (1 A)	2,5 A	29 mm 1 1/8"	102 x 127 mm 4" x 5"



ISO 8849



Con sensor de nivel incorporado. With level sensor in a single compact housing. Con sensore di livello incorporato.

REF	Icona	Voltaje	Amperaje	Diámetro	Altura
RU1500		12 V (4,8 A)	10 A	29 mm 1 1/8"	152 x 185 mm 6" x 7 1/4"
RU2000		12 V (12 A)	15 A	29 mm 1 1/8"	152 x 185 mm 6" x 7 1/4"
RU200024		24 V (4 A)	7,5 A	29 mm 1 1/8"	152 x 185 mm 6" x 7 1/4"



ISO 8849



REF	Icona	Voltaje	Amperaje	Diámetro	Altura
RU25S		12 V (1,9 A)	2,5 A	19 mm 3/4"	102 x 60 mm 4" x 2 3/8"
RU25S24		24 V (0,9 A)	1,5 A	19 mm 3/4"	102 x 60 mm 4" x 2 3/8"
RU27S		12 V (3,3 A)	6 A	29 mm 1 1/8"	114 x 60 mm 4 1/2" x 2 3/8"
RU51S		12 V (4,8 A)	10 A	29 mm 1 1/8"	210 x 197 mm 8 1/4" x 7 3/4"
RU53S		12 V (8,4 A)	15 A	29 mm 1 1/8"	124 x 121 mm 4 7/8" x 4 3/4"

ISO 8849




BOMBA SUMERGIBLE AUTOMÁTICA
AUTOMATIC BILGE PUMP
POMPA SOMMERSIBILE AUTOMÁTICA



No se requiere interruptor de flotador adicional. La bomba se enciende cuando el agua sube y se apaga cuando se elimina el agua. No additional float switch required. Pump turns on when water level rises & shuts off when water is removed.

Non è necessario interruttore e galleggianti. La pompa si accende quando il livello dell'acqua aumenta e si spegne quando si svuota.

REF	Icona	Voltaje	Diámetro	Altura
SFBP1G110006		12 V (3 A)	29 mm 1 1/8"	150 x 103 mm 5,9" x 4"
SFBP2G110006		24 V (1,8 A)	1 1/8"	4 m

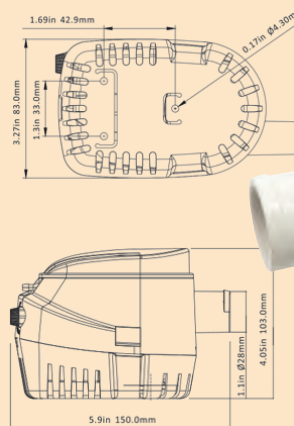

ISO 8849

REF	Icona	Voltaje	Diámetro	Altura
SFBP1G60006		12 V (2,5 A)	19 mm 3/4"	103 x 83 mm 4,05" x 3,27"
SFBP2G60006		24 V (1,5 A)	19 mm 3/4"	103 x 83 mm 4,05" x 3,27"
SFBP1G75006		12 V (3 A)	19 mm 3/4"	103 x 83 mm 4,05" x 3,27"
SFBP2G75006		24 V (1,6 A)	19 mm 3/4"	103 x 83 mm 4,05" x 3,27"



ISO 8849



SOPORTE LATERAL
SIDE MOUNT BRACKET
SUPPORTO LATERALE

SopORTE para montaje lateral de las bombas RULE redondas desde 1400 a 4200 l/h.

Side mounting bracket for bilge pumps round RULE from 350 to 1100 gph.

Supporto per il montaggio laterale delle pompe RULE da 1400 a 4200 l/h

REF
RU66





Soporte para montaje lateral de las bombas RULE-MATE desde 1900 a 4200 l/h.

Side mounting bracket for bilge pumps round RULE-MATE from 500 to 1100 gph.

Supporto per montaggio laterale delle pompe RULE-Mate da 1900 a 4200l/h.

REF
RU99



BOMBA DE VIVERO
LIVEWELL PUMP
VIVAIO POMPA

REF	Flow	Voltage	Ø
SFBP1G35004	350 GPH	12 V (1 A)	19 mm / 3/4"
SFBP1G60004	600 GPH	12 V (3 A)	19 mm / 3/4"
SFBP1G80004	800 GPH	12 V (4 A)	19 mm / 3/4"
SFBP1G35005	350 GPH	12 V (1 A)	19 mm / 3/4"
SFBP1G60005	600 GPH	12 V (3 A)	19 mm / 3/4"
SFBP1G80005	800 GPH	12 V (4 A)	19 mm / 3/4"



SFBP1G35004
SFBP1G60004
SFBP1G80004



SFBP1G35005
SFBP1G60005
SFBP1G80005

Kit completo para oxigenar los viveros. Para 11 kgs de cebo.

Complete kit for livewells. For 25 lbs of bait.

Kit completo per ossigenare il vivaio. Per 11k di esca

REF	Flow	Voltage
RU255	700 GPH / 2.650 l/h	12 V



MOTOR DE RECAMBIO
REPLACEMENT ENGINE
MOTORE DI RICAMBIO

REF	Voltage
RU20RR	12 V



BOMBA DEPÓSITOS
TANK PUMP
POMPA PER SERBATOIO

REF	Flow	Voltage
SFSP1L01201	12 l/min	12 V
SFSP1L01901	16 l/min	12 V



REF	Flow	Voltage	Dimensions (mm)	Weight
GS20145	7,5 l/min	12 V (2 A)	102 x 40	11 mm



DEPÓSITO DESAGÜE CON BOMBA
SHOWER SUMP WITH PUMP
SERBATOIO DRENAGGIO CON POMPA

Depósito para recoger las aguas de los desagües de ducha, fregaderos, etc. Incorpora una bomba sumergible con interruptor automático.

Multi-port shower sump. Includes a submersible pump with float switch and internal check valve that prevents water back siphoning.

Serbatoio per raccogliere le acque degli scarichi di docce, etc. Incorpora una pompa sommergibile con interruttore automatico.

REF	Flow	Voltage	Dimensions (mm)	Weight
SFBP1G75007	750 GPH 2.900 l/h	12 V (3 A)	19, 28, 38 mm 3/4", 1 1/8", 1 1/2"	19 mm
SFBP2G75007	750 GPH 2.900 l/h	24 V (1,6 A)	19, 28, 38 mm 3/4", 1 1/8", 1 1/2"	334 x 215 x 112



Depósito para recoger las aguas de los desagües de ducha, fregaderos, etc. Incorpora una bomba sumergible con interruptor automático.

Multi-port shower sump. Includes a submersible pump with float switch and internal check valve that prevents water back siphoning.

Serbatoio per raccogliere le acque degli scarichi di docce, etc. Incorpora una pompa sommergibile con interruttore automatico.

REF	Flow	Voltage	Dimensions (mm)	Weight
RU98A	800 GPH 3.000 l/h	12 V (2,8 A)	19, 28, 38 mm 3/4", 1 1/8", 1 1/2"	19 mm
RU98A24	800 GPH 3.000 l/h	24 V (1,3 A)	19, 28, 38 mm 3/4", 1 1/8", 1 1/2"	210 x 241 x 140

